

A note on the assumptions made while computing the postseismic lithospheric deformation

SARVA JIT SINGH*, MAHABIR SINGH* and KULDIP SINGH**

*Department of Mathematics, Maharshi Dayanand University, Rohtak 124 001, India.

**Department of Applied Mathematics, Guru Jambheshwar University, Hisar 125 001, India.

The postseismic lithospheric deformation is usually explained as viscoelastic relaxation of the coseismic stresses. In general, for computing the postseismic deformation, the shear modulus (μ) is relaxed, keeping either the bulk modulus (k) or the Lamé parameter (λ) fixed. It is shown that the two assumptions yield significantly different results. The assumption $k = \text{const.}$ implies that the medium behaves like an elastic body for dilatational changes which can be justified on physical grounds, but such a justification cannot be given in the case of the assumption $\lambda = \text{const.}$

1. Introduction

The elasticity theory of dislocations has been successfully applied in the recent past to model the coseismic lithospheric deformation. The postseismic deformation can be explained as viscoelastic relaxation of the coseismic stresses. The correspondence principle of linear viscoelasticity has been widely used for calculating the postseismic deformation. In the case of an isotropic material, there are only two elastic moduli. In the general case, both these elastic moduli should be relaxed for calculating the viscoelastic response of the medium. However, for simplicity, only the shear modulus (μ) is relaxed, keeping either the bulk modulus (k) or the Lamé parameter (λ) fixed. Rosenman and Singh (1973a,b), Singh and Rosenman (1974), Nur and Mavko (1974), Peltier (1974), Matsu'ura and Tanimoto (1980), Cohen (1980, 1982), Matsu'ura *et al* (1981), Iwasaki and Matsu'ura (1981, 1982), Malosh and Raefsky (1983), Iwasaki (1985, 1986), Bonafede *et al* (1986), Dragoni and Magnanensi (1989) and Pollitz (1992) assumed a constant value for the bulk modulus while computing the viscoelastic response. In contrast, Rundle and Jackson (1977), Rundle (1978, 1982), Thatcher and Rundle (1979) and Ma and Kusznrir (1994a,b; 1995) assumed a constant value for the Lamé parameter λ when computing the viscoelastic response.

Singh and Singh (1990) gave a simple procedure for obtaining the quasi-static displacements, strains and stresses in a viscoelastic half-space under the assumption $k = \text{const.}$ In this note, we give the corresponding results for $\lambda = \text{const.}$ and show that the two assumptions yield significantly different results. The assumption $k = \text{const.}$ might be more appropriate since it implies that the medium behaves like an elastic body for dilatational changes and like a viscoelastic body for deviatoric changes. This type of physical interpretation cannot be given for the assumption $\lambda = \text{const.}$

2. Auxiliary functions for fixed k

In the expressions for the displacements, strains and stresses due to a source in a homogeneous, isotropic, elastic half-space, the elastic moduli occur in the following combinations:

$$Q_1 = \frac{1}{3k + 4\mu} = \frac{1}{3(\lambda + 2\mu)},$$

$$Q_2 = \frac{2\mu}{3k + 4\mu} = \frac{2\mu}{3(\lambda + 2\mu)},$$

$$Q_3 = \frac{1}{3k + \mu} = \frac{1}{3(\lambda + \mu)},$$

Keywords. Deformation; postseismic; quasi-static; relaxation; viscoelastic.

$$\begin{aligned}
Q_4 &= \frac{2\mu}{3k + \mu} = \frac{2\mu}{3(\lambda + \mu)}, \\
Q_5 &= \frac{2\mu^2}{3k + 4\mu} = \frac{2\mu^2}{3(\lambda + 2\mu)}, \\
Q_6 &= \frac{2\mu^2}{3k + \mu} = \frac{2\mu^2}{3(\lambda + \mu)},
\end{aligned} \quad (1)$$

where λ, μ are the Lamé parameters and $k = \lambda + (2/3)\mu$ is the bulk modulus. For example, the displacements due to a centre of dilatation in a half-space can be expressed in terms of Q_1 and Q_3 (we need only Q_3 for surface displacements). The displacement field due to a shear dislocation in a half-space can be expressed in terms of Q_2 and Q_4 (only Q_4 for surface displacements). For stresses, we need Q_2 and Q_4 in the case of a centre of dilatation and Q_5 and Q_6 in the case of a shear dislocation.

Let the source-time function be the unit step function $H(t)$. Then, from the correspondence principle, the Laplace transform of the viscoelastic solution is obtained on replacing Q_1 by

$$\frac{1}{s[3\bar{k}(s) + 4\bar{\mu}(s)]} = \frac{1}{3s[\bar{\lambda}(s) + 2\bar{\mu}(s)]} \quad (2)$$

and similarly for the other functions. Here, s is the Laplace transform variable and $\bar{\lambda}(s)$, $\bar{\mu}(s)$ and $\bar{k}(s)$ are the transform elastic moduli. On inverting, we find that Q_1 in the elastic response is replaced by $\hat{Q}_1(t)$ in the viscoelastic response, where

$$\begin{aligned}
\hat{Q}_1(t) &= L^{-1} \left[\frac{1}{s\{3\bar{k}(s) + 4\bar{\mu}(s)\}} \right] \\
&= L^{-1} \left[\frac{1}{3s\{\bar{\lambda}(s) + 2\bar{\mu}(s)\}} \right],
\end{aligned} \quad (3)$$

where L^{-1} denotes the inverse Laplace transform. Similarly, Q_i ($i = 2, 3, 4, 5, 6$) are replaced by the auxiliary functions $\hat{Q}_i(t)$.

Singh and Singh (1990) derived the auxiliary functions for the Kelvin model, the Maxwell model and the SLS (Standard Linear Solid) when the medium behaves elastically for dilatational changes and viscoelastically for deviatoric changes. For this purpose, Singh and Singh (1990) relaxed the shear modulus, keeping the bulk modulus fixed so that

$$\bar{k}(s) = k, \quad \bar{\lambda}(s) = k - \frac{2}{3}\bar{\mu}(s).$$

Defining

$$q_i(t) = \hat{Q}_i(t)/Q_i \quad (i = 1, 2, 3, 4, 5, 6),$$

the results of Singh and Singh (1990) for the Maxwell model and SLS can be summarized as under.

2.1 Maxwell model

The constitutive equation for a Maxwell material is

$$\frac{\partial \tau}{\partial t} + \frac{\tau}{t_2} = 2\mu \frac{\partial e}{\partial t}, \quad (4)$$

where τ is the shear stress, e is the shear strain and t_2 is the relaxation time. The expressions for the auxiliary functions for the Poisson case ($\lambda = \mu$) are

$$\begin{aligned}
Q_1 &= \frac{9}{5} - \frac{4}{5} \exp(-\frac{5}{9}T), \\
Q_2 &= \exp(-\frac{5}{9}T), \\
Q_3 &= \frac{6}{5} - \frac{1}{5} \exp(-\frac{5}{9}T), \\
Q_4 &= \exp(-\frac{5}{9}T), \\
Q_5 &= \frac{9}{4} \exp(-T) - \frac{5}{4} \exp(-\frac{5}{9}T), \\
Q_6 &= 6 \exp(-T) - 5 \exp(-\frac{5}{9}T),
\end{aligned} \quad (5)$$

where $T = t/t_2 > 0$.

2.2 Standard linear solid

Assuming that the elastic constants of the two springs of the SLS model are equal, the constitutive equation for SLS can be written as

$$\tau + t_2 \frac{\partial \tau}{\partial t} = \mu \left(e + 2t_2 \frac{\partial e}{\partial t} \right). \quad (6)$$

Assuming $\lambda = \mu$, the expressions for the auxiliary functions are ($T > 0$)

$$\begin{aligned}
q_1 &= \frac{9}{7} - \frac{2}{7} \exp(-\frac{7}{9}T), \\
q_2 &= \frac{9}{14} + \frac{5}{14} \exp(-\frac{7}{9}T), \\
q_3 &= \frac{12}{11} - \frac{1}{11} \exp(-\frac{11}{12}T), \\
q_4 &= \frac{6}{11} + \frac{5}{11} \exp(-\frac{11}{12}T), \\
q_5 &= \frac{9}{28} + \frac{9}{8} \exp(-T) - \frac{25}{56} \exp(-\frac{7}{9}T), \\
q_6 &= \frac{3}{11} + 3 \exp(-T) - \frac{25}{11} \exp(-\frac{11}{12}T).
\end{aligned} \quad (7)$$

3. Auxiliary functions for fixed λ

The auxiliary functions when the Lamé parameter λ is kept fixed can be derived similarly. In this case

$$\bar{\lambda}(s) = \lambda, \quad \bar{k}(s) = \lambda + \frac{2}{3}\bar{\mu}(s), \quad (8)$$

Table 1. Limiting values of $q_i(t)$ as $t \rightarrow \infty$.

$q_i(t)$	Maxwell model		SLS	
	k fixed	λ fixed	k fixed	λ fixed
q_1	$\frac{9}{5}$	3	$\frac{9}{7}$	$\frac{3}{2}$
q_2	0	0	$\frac{9}{14}$	$\frac{3}{4}$
q_3	$\frac{6}{5}$	2	$\frac{12}{11}$	$\frac{4}{3}$
q_4	0	0	$\frac{6}{11}$	$\frac{2}{3}$
q_5	0	0	$\frac{9}{28}$	$\frac{3}{8}$
q_6	0	0	$\frac{3}{11}$	$\frac{1}{3}$

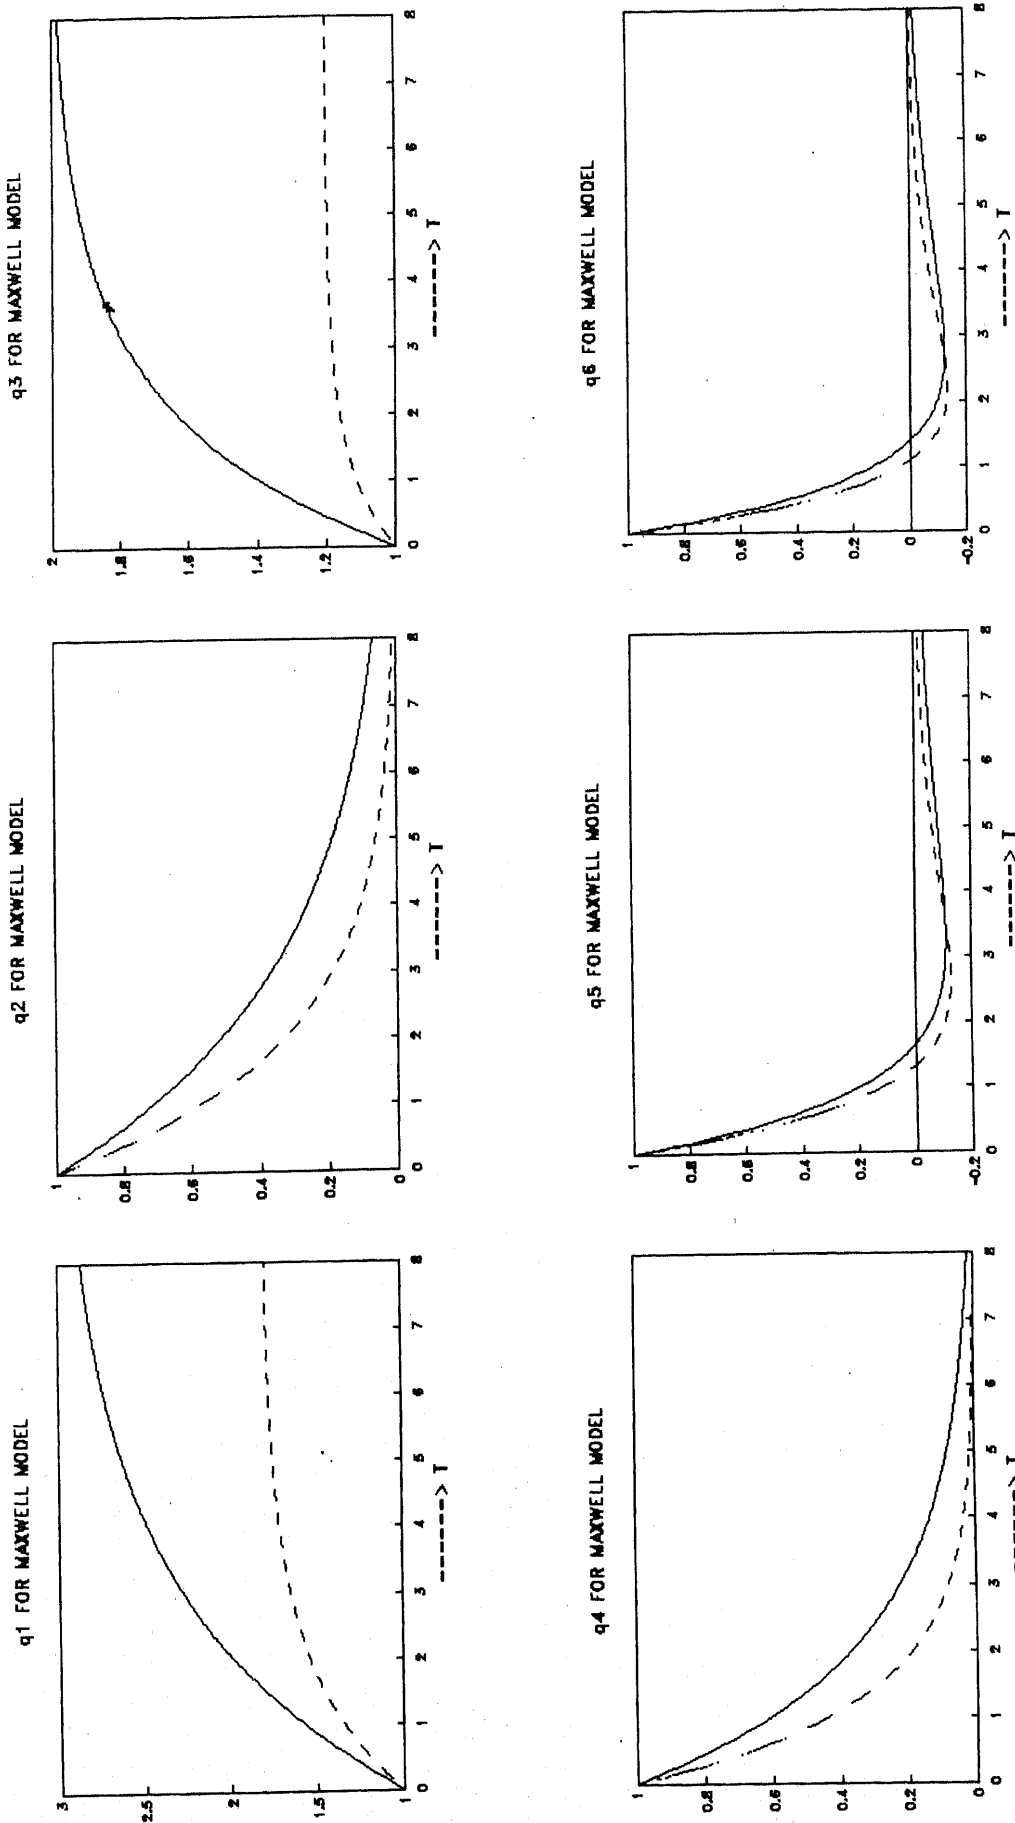


Figure 1. Variation of auxiliary functions with dimensionless time $T = t/t_0$ for the Maxwell model, under the assumption $\lambda = \mu$. The solid line is for $\lambda = \text{const.}$ and the broken line is for $k = \text{const.}$

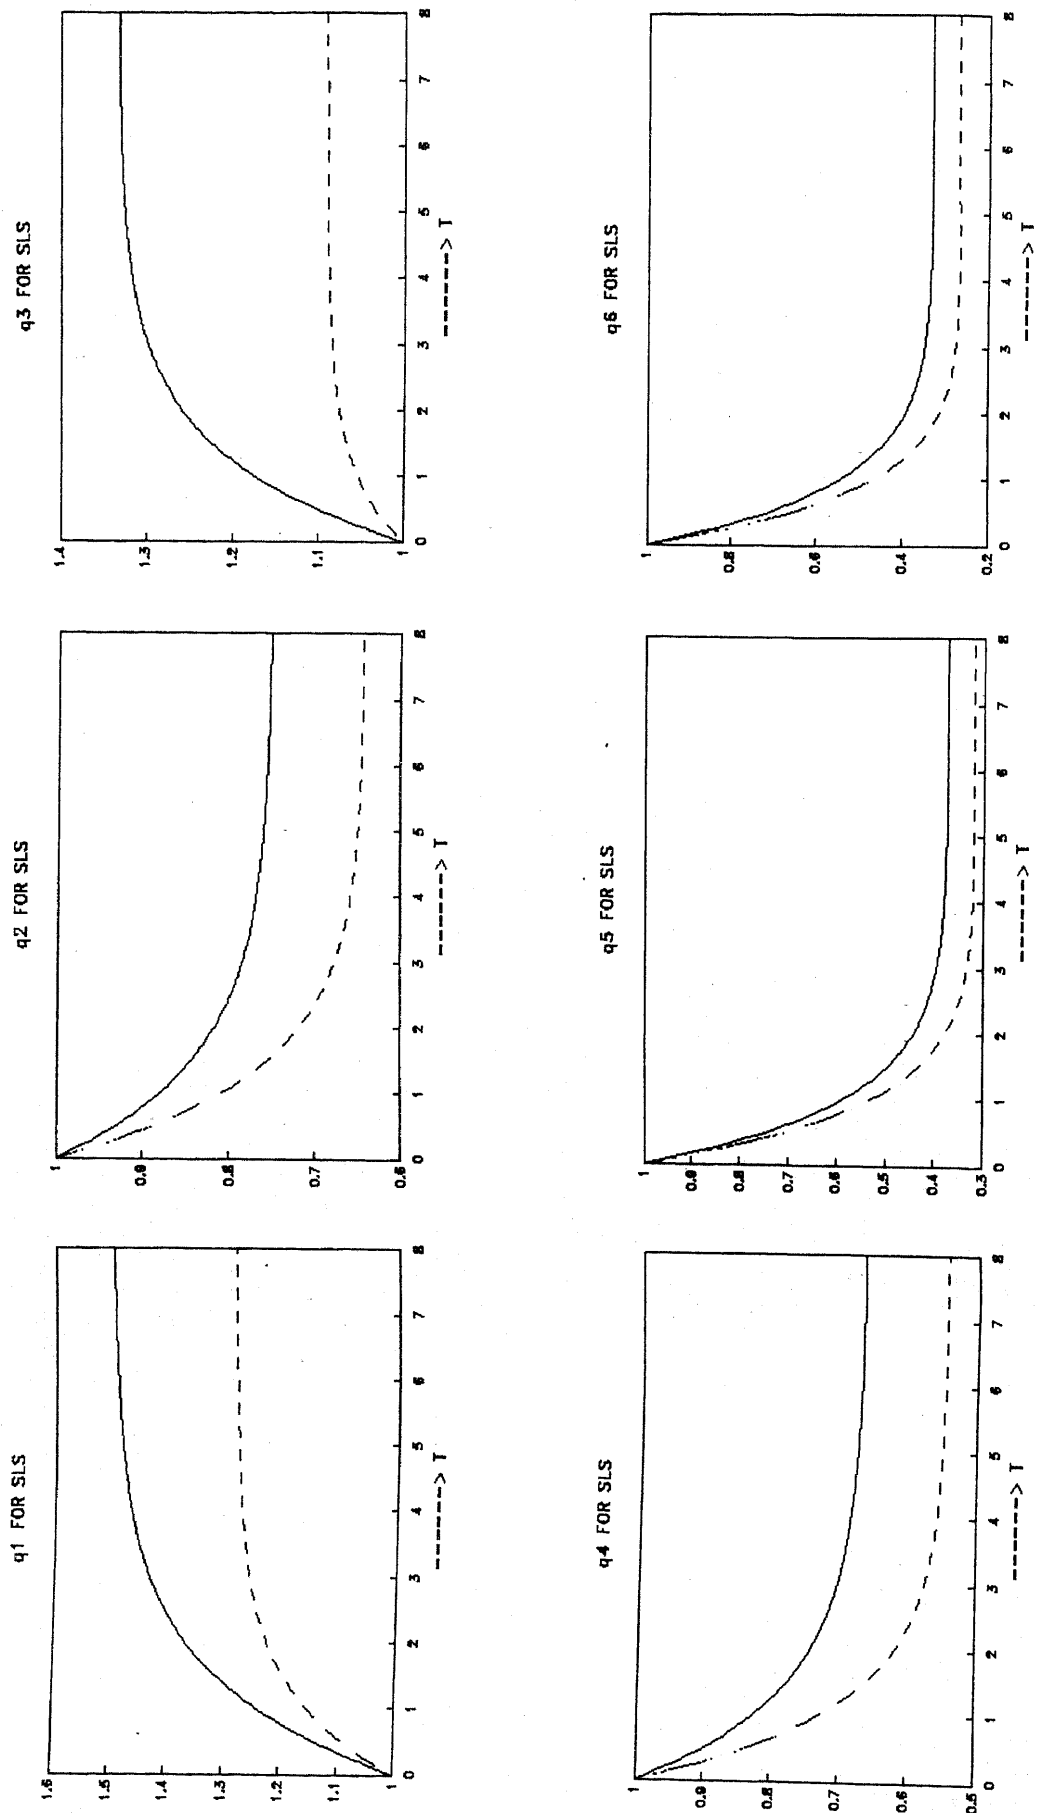


Figure 2. Variation of the auxiliary functions with dimensionless time $T = t/t_0$ for the Standard Linear Solid (SLS), under the assumption that the elastic constants of the two springs of the SLS model are equal and that $\lambda = \mu$. The solid line is for $\lambda = \mu$. and the broken line is for $\lambda = \text{const}$.

so that while relaxing the shear modulus, the bulk modulus also gets relaxed. In this case, we find the following expressions for the auxiliary functions for a Poissonian material ($\lambda = \mu$).

3.1 Maxwell model

$$\begin{aligned} q_1 &= 3 - 2 \exp(-\frac{1}{3} T), \\ q_2 &= \exp(-\frac{1}{3} T), \\ q_3 &= 2 - \exp(-\frac{1}{2} T), \\ q_4 &= \exp(-\frac{1}{2} T), \\ q_5 &= \frac{3}{2} \exp(-T) - \frac{1}{2} \exp(-\frac{1}{3} T), \\ q_6 &= 2 \exp(-T) - \exp(-\frac{1}{2} T). \end{aligned} \quad (9)$$

3.2 Standard linear solid

$$\begin{aligned} q_1 &= \frac{3}{2} - \frac{1}{2} \exp(-\frac{2}{3} T), \\ q_2 &= \frac{3}{4} + \frac{1}{4} \exp(-\frac{2}{3} T), \\ q_3 &= \frac{4}{3} - \frac{1}{3} \exp(-\frac{3}{4} T), \\ q_4 &= \frac{2}{3} + \frac{1}{3} \exp(-\frac{3}{4} T), \\ q_5 &= \frac{3}{8} - \frac{1}{8} \exp(-\frac{2}{3} T) + \frac{3}{4} \exp(-T), \\ q_6 &= \frac{1}{3} - \frac{1}{3} \exp(-\frac{3}{4} T) + \exp(-T). \end{aligned} \quad (10)$$

Table 1 gives the limiting values of $q_i(t)$ as $t \rightarrow \infty$. We note that the limiting values of q_i when λ is kept fixed are much larger than the corresponding values when k is kept fixed. However, in all cases, $q_i(t) \rightarrow 1$ as $t \rightarrow +\infty$.

4. Numerical results and discussion

Figure 1 shows the variation of the auxiliary functions q_i with dimensionless time $T = t/t_2$ for the Maxwell model, assuming $\lambda = \mu$. The solid line is for $\lambda = \text{const.}$ and the broken line is for $k = \text{const.}$ We note that, for all times, the values of q_1 and q_3 when λ is fixed are much larger than the corresponding values when k is fixed. As $t \rightarrow \infty$, q_2 and q_4 tend to zero much faster under the assumption $k = \text{const.}$ The difference between the values of q_5 and q_6 under the two assumptions is not significant.

Figure 2 shows the variation of q_i for SLS. For this model, for all times, the values of q_i when λ is held fixed are significantly larger than the corresponding values when k is held fixed.

Since the values of the auxiliary functions q_i under the two assumptions are significantly different, the choice between the two assumptions $k = \text{const.}$ and $\lambda = \text{const.}$ becomes important. The assumption $k = \text{const.}$ seems more relevant since it is based on

the physical consideration that the medium behaves elastically for dilatational changes.

References

- Bonafede M, Dragoni M and Quarenì F 1986 Displacement and stress fields produced by a centre of dilation and by a pressure source in a viscoelastic half-space; *Geophys. J. R. Astron. Soc.* **87** 455–485
- Cohen S C 1980 Postseismic viscoelastic surface deformation and stress-1. Theoretical considerations, displacement and strain calculations; *J. Geophys. Res.* **85** 3131–3150
- Cohen S C 1982 A multilayer model of time dependent deformation following an earthquake on a strike slip fault; *J. Geophys. Res.* **87** 5409–5421
- Dragoni M and Magnanensi C 1989 Displacement and stress produced by a pressurized, spherical magma chamber, surrounded by a viscoelastic shell; *Phys. Earth Planet. Int.* **56** 316–328
- Iwasaki T 1985 Quasi-static deformation due to a dislocation source in a Maxwellian viscoelastic earth model; *J. Phys. Earth* **33** 21–43
- Iwasaki T 1986 Displacement, strain and stress within a viscoelastic half-space due to a rectangular fault; *J. Phys. Earth* **34** 371–396
- Iwasaki T and Matsu'ura M 1981 Quasi-static strains and tilts due to faulting in a layered half-space with an intervenient viscoelastic layer; *J. Phys. Earth* **29** 499–518
- Iwasaki T and Matsu'ura M 1982 Quasi-static crustal deformations due to a surface load; Rheological structure of the earth's crust and upper mantle; *J. Phys. Earth* **30** 469–508
- Ma X Q and Kusznir N J 1994a Effects of rigidity layering, gravity and stress relaxation on 3-D subsurface fault displacement fields; *Geophys. J. Int.* **118** 201–220
- Ma X Q and Kusznir N J 1994b Coseismic and postseismic subsurface displacements and strains for a vertical strike-slip fault in a three-layer elastic medium; *Pure Appl. Geophys.* **142** 687–709
- Ma X Q and Kusznir N J 1995 Coseismic and postseismic subsurface displacements and strains for a dip-slip normal fault in a three-layer elastic-gravitational medium; *J. Geophys. Res.* **100** 12, 813–12, 828
- Malosh H J and Raefsky A 1983 An elastic response of the Earth to a dip-slip earthquake; *J. Geophys. Res.* **88** 515–526
- Matsu'ura M and Tanimoto T 1980 Quasi-static deformations due to an inclined rectangular fault in a viscoelastic half-space; *J. Phys. Earth* **28** 103–118
- Matsu'ura M, Tanimoto T and Iwasaki T 1981 Quasi-static displacements due to faulting in a layered half-space with an intervenient viscoelastic layer; *J. Phys. Earth* **29** 23–54
- Nur A and Mavko G 1974 Postseismic viscoelastic rebound; *Science* **183** 204–206
- Peltier W R 1974 The impulse response of a Maxwell earth; *Rev. Geophys. Space Phys.* **12** 649–669
- Pollitz F F 1992 Postseismic relaxation theory on the spherical Earth; *Bull. Seismol. Soc. Am.* **82** 422–453
- Rosenman M and Singh S J 1973a Quasi-static strains and tilts due to faulting in a viscoelastic half-space; *Bull. Seismol. Soc. Am.* **63** 1737–1752
- Rosenman M and Singh S J 1973b Stress relaxation in a semi-infinite viscoelastic Earth model; *Bull. Seismol. Soc. Am.* **63** 2145–2154
- Rundle J B 1978 Viscoelastic crustal deformation by finite quasi-static sources; *J. Geophys. Res.* **83** 5937–5945
- Rundle J B 1982 Viscoelastic-gravitational deformation by a rectangular thrust fault in a layered earth; *J. Geophys. Res.* **87** 7787–7796

- Rundle J B and Jackson D D 1977 A three-dimensional viscoelastic model of a strike-slip fault; *Geophys. J. R. Astron. Soc.* **49** 575-591
- Singh K and Singh S J 1990 A simple procedure for obtaining the quasi-static displacements, strains, and stresses in a viscoelastic half-space; *Bull. Seismol. Soc. Am.* **80** 488-492
- Singh S J and Rosenman M 1974 Quasi-static deformation of a viscoelastic half-space by a displacement dislocation; *Phys. Earth Planet. Int.* **8** 87-101
- Thatcher W and Rundle J B 1979 A model for the earthquake cycle in under thrust zones; *J. Geophys. Res.* **84** 5540-5556

MS received 11 December 1996; revised 27 March 1997